



Артикул №

2485

Стандарт

СТП

Режущий материал

Цельный тв. сплав

Группа применения тв.сплава

К/Р

Покрытие



Направление резания

правое

Допуск


Группа скидок

141

Техническая информация на стр.

137

Сверлильная сист.
со сменными
пластинами T 800

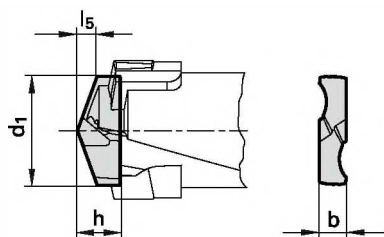

Размер опоры	d1 h7		l5	b	h	Код №	Цена/шт. в ЕВРО
	мм	дюйм	мм	мм	мм		
0.1	16,000		3,00	4,500	8,00	16,000	●
0.1	16,270	41/64	3,00	4,500	8,00	16,270	●
0.1	16,500		3,10	4,500	8,00	16,500	●
0.1	16,670	21/32	3,10	4,500	8,00	16,670	●
0.1	17,000		3,10	4,500	8,00	17,000	●
0.2	17,070	43/64	3,20	4,500	8,00	17,070	●
0.2	17,460	11/16	3,20	4,500	8,00	17,460	●
0.2	17,500		3,20	4,500	8,00	17,500	●
0.2	17,860	45/64	3,30	4,500	8,00	17,860	●
1.1	18,000		3,30	5,000	8,00	18,000	●
1.1	18,260	23/32	3,40	5,000	8,00	18,260	●
1.1	18,500		3,40	5,000	8,00	18,500	●
1.1	18,650	47/64	3,40	5,000	8,00	18,650	●
1.1	19,000		3,50	5,000	8,00	19,000	●
1.2	19,050	3/4	3,50	5,000	8,00	19,050	●
1.2	19,250		3,60	5,000	8,00	19,250	●
1.2	19,450	49/64	3,60	5,000	8,00	19,450	●
1.2	19,500		3,60	5,000	8,00	19,500	●
1.2	19,840	25/32	3,70	5,000	8,00	19,840	●
1.2	20,000		3,70	5,000	8,00	20,000	●
2.1	20,240	51/64	3,70	5,500	8,80	20,240	●
2.1	20,500		3,80	5,500	8,80	20,500	●
2.1	20,640	13/16	3,80	5,500	8,80	20,640	●
2.1	21,000		3,90	5,500	8,80	21,000	●
2.2	21,030	53/64	3,90	5,500	8,80	21,030	●
2.2	21,430	27/32	3,90	5,500	8,80	21,430	●
2.2	21,500		4,00	5,500	8,80	21,500	●
2.2	21,830	55/64	4,00	5,500	8,80	21,830	●
2.2	22,000		4,10	5,500	8,80	22,000	●
2.2	22,220	7/8	4,10	5,500	8,80	22,220	●
2.2	22,500		4,10	5,500	8,80	22,500	●
3.1	22,620	57/64	4,20	6,300	10,00	22,620	●
3.1	23,000		4,20	6,300	10,00	23,000	●
3.1	23,020	29/32	4,20	6,300	10,00	23,020	●
3.1	23,420	59/64	4,30	6,300	10,00	23,420	●
3.1	23,500		4,30	6,300	10,00	23,500	●
3.1	23,810	15/16	4,40	6,300	10,00	23,810	●
3.1	24,000		4,40	6,300	10,00	24,000	●
3.2	24,210	61/64	4,50	6,300	10,00	24,210	●

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum