

Сверла с твердосплавной режущей частью

Спиральные сверла
с конусом Морзе

Артикул №
Стандарт
Режущий материал
Покрытие
Тип
Направление резания
Допуск
Группа скидок
Техническая информация на стр.

705

DIN 8041

Твердый сплав




N

правое

h8

102

183

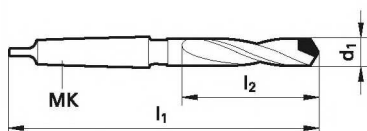

d1	MK	l1	l2
MM		MM	MM
8,500	1	135,00	45,00
10,000	1	140,00	50,00
10,200	1	140,00	50,00
10,500	1	140,00	50,00
11,000	1	140,00	50,00
11,500	1	146,00	56,00
12,000	1	146,00	56,00
13,000	1	146,00	56,00
13,500	2	168,00	63,00
14,000	2	168,00	63,00
14,500	2	168,00	63,00
15,000	2	168,00	63,00
15,500	2	175,00	70,00
16,000	2	175,00	70,00
16,500	2	175,00	70,00
17,000	2	175,00	70,00
17,500	2	185,00	80,00
18,000	2	185,00	80,00
19,000	2	185,00	80,00
19,500	3	215,00	90,00
20,000	3	215,00	90,00
21,000	3	215,00	90,00
21,500	3	215,00	90,00
22,000	3	215,00	90,00
23,000	3	225,00	100,00
24,000	3	225,00	100,00
24,500	3	225,00	100,00
25,000	3	225,00	100,00
26,000	4	260,00	110,00
26,500	4	260,00	110,00
27,000	4	260,00	110,00
28,000	4	260,00	110,00
30,000	4	275,00	125,00
32,000	4	275,00	125,00
33,000	4	290,00	140,00
38,000	4	310,00	160,00
40,000	4	310,00	160,00

Цена/шт. в ЕВРО



C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum