


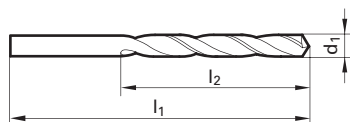
Артикул №	8920
Стандарт	DIN 1869 R1
Режущий материал	HSS
Покрытие	
Тип	GT 100
Направление резания	правое
Допуск	h8
Группа скидок	101

Диапазон диаметров: 2,000 - 13,000

Затыловка: Конусная

Угол при вершине сверла: 130°

Подточка ≥Ø: 2,00 мм



d1 мм	d1 дюйм	l1 мм	l2 мм	Наличие на складе
2,000		125,000	85,000	●
2,100		125,000	85,000	●
2,200		135,000	90,000	●
2,300		135,000	90,000	●
2,380	3/32	140,000	95,000	●
2,400		140,000	95,000	●
2,500		140,000	95,000	●
2,600		140,000	95,000	●
2,700		150,000	100,000	●
2,800		150,000	100,000	●
3,000		150,000	100,000	●
3,170	1/8	155,000	105,000	●
3,200		155,000	105,000	●
3,300		155,000	105,000	●
3,500		165,000	115,000	●
4,000		175,000	120,000	●
4,200		175,000	120,000	●
4,500		185,000	125,000	●
4,760	3/16	195,000	135,000	●
5,000		195,000	135,000	●
5,200		195,000	135,000	●
5,500		205,000	140,000	●
6,000		205,000	140,000	●
6,350	1/4	215,000	150,000	●
6,500		215,000	150,000	●
6,800		225,000	155,000	●
7,000		225,000	155,000	●
7,500		225,000	155,000	●
7,940	5/16	240,000	165,000	●
8,000		240,000	165,000	●
8,500		240,000	165,000	●
9,000		250,000	175,000	●
9,500		250,000	175,000	●
9,520	3/8	265,000	185,000	●
10,000		265,000	185,000	●
10,200		265,000	185,000	●
10,500		265,000	185,000	●
11,000		280,000	195,000	●
11,110	7/16	280,000	195,000	●
11,500		280,000	195,000	●
12,000		295,000	205,000	●
12,500		295,000	205,000	●
12,700	1/2	295,000	205,000	●
13,000		295,000	205,000	●