


Артикул №	8922
Стандарт	DIN 1869 R3
Режущий материал	HSS
Покрытие	
Тип	GT 100
Направление резания	правое
Допуск	h8
Группа скидок	101

Диапазон диаметров: 2,500 - 13,000

Затыловка: Конусная

Угол при вершине сверла: 130°

Подточка ≥Ø: 2,50 мм

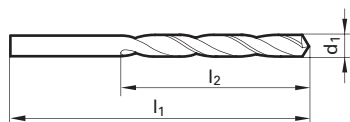

d1 мм	d1 дюйм	l1 мм	l2 мм	Наличие на складе
2,500		225,000	150,000	●
3,000		240,000	160,000	●
3,170	1/8	250,000	170,000	●
3,300		250,000	170,000	●
3,500		265,000	180,000	●
4,000		280,000	190,000	●
4,200		280,000	190,000	●
4,500		295,000	200,000	●
4,760	3/16	315,000	210,000	●
5,000		315,000	210,000	●
5,500		330,000	225,000	●
6,000		330,000	225,000	●
6,350	1/4	350,000	235,000	●
6,500		350,000	235,000	●
6,800		370,000	250,000	●
7,000		370,000	250,000	●
7,500		370,000	250,000	●
7,940	5/16	390,000	265,000	●
8,000		390,000	265,000	●
8,500		390,000	265,000	●
9,000		410,000	280,000	●
9,500		410,000	280,000	●
9,520	3/8	430,000	295,000	●
10,000		430,000	295,000	●
10,500		430,000	295,000	●
11,000		455,000	310,000	●
11,110	7/16	455,000	310,000	●
11,500		455,000	310,000	●
12,000		480,000	330,000	●
12,500		480,000	330,000	●
13,000		480,000	330,000	●