


UNC



Series 4128
Thread Depth 2 X D
Tool Material Solid Carbide
Coating TiCN
Shank HA (round)
Countersink No

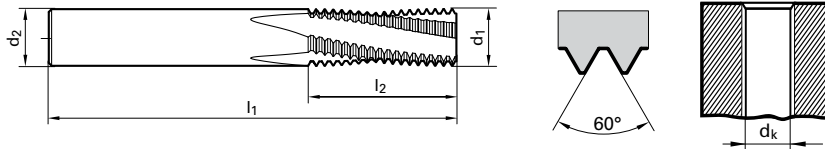

UNC Size	dk inch	d1 inch	d2 inch	l1 inch	l2 inch	No. flutes	4128 EDP #
10 -24	0.154	0.136	0.250	2.500	0.437	3	9041280048260
12 -24	0.177	0.161	0.250	2.500	0.480	3	9041280054860
1/4 -20	0.201	0.185	0.250	2.500	0.575	3	9041280063500
5/16-18	0.259	0.242	0.250	2.500	0.693	3	9041280079380
3/8 -16	0.315	0.301	0.313	2.500	0.843	3	9041280095250
7/16-14	0.370	0.354	0.375	3.000	0.965	3	9041280111130
1/2 -13	0.425	0.371	0.375	3.000	1.114	3	9041280127000
9/16-12	0.480	0.449	0.500	3.752	1.209	4	9041280142880
5/8 -11	0.531	0.496	0.500	3.752	1.409	4	9041280158750
3/4 -10	0.650	0.621	0.625	4.252	1.551	4	9041280190500
7/8 - 9	0.768	0.621	0.625	4.252	1.835	4	9041280222250
1 - 8	0.876	0.621	0.625	4.252	1.937	4	9041280254000

UNF



Series 4129
Thread Depth 2 X D
Tool Material Solid Carbide
Coating TiCN
Shank HA (round)
Countersink No

UNF Size	dk inch	d1 inch	d2 inch	l1 inch	l2 inch	No. flutes	4129 EDP #
10 -32	0.161	0.150	0.250	2.500	0.453	3	9041290048260
12 -28	0.181	0.169	0.250	2.500	0.480	3	9041290054860
1/4 -28	0.217	0.203	0.250	2.500	0.555	3	9041290063500
5/16-24	0.271	0.242	0.250	2.500	0.689	3	9041290079380
3/8 -24	0.335	0.309	0.313	2.500	0.811	3	9041290095250
7/16-20	0.390	0.371	0.375	3.000	0.976	3	9041290111130
1/2 -20	0.453	0.371	0.375	3.000	1.075	3	9041290127000
9/16-18	0.508	0.449	0.500	3.752	1.193	4	9041290142880
5/8 -18	0.571	0.496	0.500	3.752	1.307	4	9041290158750
3/4 -16	0.689	0.621	0.625	4.252	1.531	4	9041290190500
7/8 -14	0.803	0.621	0.625	4.252	1.823	4	9041290222250
1 -12	0.915	0.621	0.625	4.252	1.791	4	9041290254000