

EXCLUSIVE^{LINE}[®]

HR 500 ALU solid carbide high-performance reamers


ALU

High-performance reamers ALU



The solid carbide HPC reamer HR 500 operates with highest cutting rates and produces extremely high-quality holes. Therefore, it often enables considerable savings in the process costs. In addition, it provides very high process reliability.

The special coolant supply of the type HS 500 D with flutes in the shank ensures optimal chip evacuation and reliable cooling.

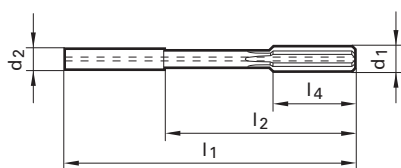

Code no.	d1	d2 h6	l1	l2	l4	
	mm	mm	mm	mm	mm	
4.000	4.000	4.000	68.00	40.00	12.00	4
5.000	5.000	6.000	76.00	40.00	12.00	4
6.000	6.000	6.000	76.00	40.00	12.00	4
7.000	7.000	8.000	101.00	65.00	16.00	6
8.000	8.000	8.000	101.00	65.00	16.00	6
10.000	10.000	10.000	101.00	61.00	19.00	6
12.000	12.000	12.000	130.00	85.00	19.00	6
14.000	14.000	14.000	130.00	85.00	22.00	6
16.000	16.000	16.000	150.00	102.00	22.00	6
18.000	18.000	18.000	150.00	102.00	25.00	6
20.000	20.000	20.000	150.00	100.00	25.00	6

Solid carbide

**HR 500
Alu S**

**HR 500
Alu D**

Guhring no.
1678
1679
Surface finish
166
166
Discount group


Availability

