



High-performance reamers



The solid carbide HPC reamer HR 500 operates with highest cutting rates and produces extremely high-quality holes. Therefore, it often enables considerable savings in the process costs. In addition, it provides very high process reliability.

The special coolant supply of the type HS 500 D with flutes in the shank ensures optimal chip evacuation and reliable cooling.

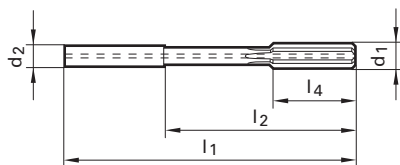

Code no.	d1	d2 h6	l1	l2	l4	
	mm	mm	mm	mm	mm	
2.970	2.970	4.000	68.00	40.00	12.00	4
2.980	2.980	4.000	68.00	40.00	12.00	4
2.990	2.990	4.000	68.00	40.00	12.00	4
3.000	3.000	4.000	68.00	40.00	12.00	4
3.010	3.010	4.000	68.00	40.00	12.00	4
3.020	3.020	4.000	68.00	40.00	12.00	4
3.030	3.030	4.000	68.00	40.00	12.00	4
3.970	3.970	4.000	68.00	40.00	12.00	4
3.980	3.980	4.000	68.00	40.00	12.00	4
3.990	3.990	4.000	68.00	40.00	12.00	4
4.000	4.000	4.000	68.00	40.00	12.00	4
4.010	4.010	4.000	68.00	40.00	12.00	4
4.020	4.020	4.000	68.00	40.00	12.00	4
4.030	4.030	4.000	68.00	40.00	12.00	4
4.970	4.970	6.000	76.00	40.00	12.00	4
4.980	4.980	6.000	76.00	40.00	12.00	4
4.990	4.990	6.000	76.00	40.00	12.00	4
5.000	5.000	6.000	76.00	40.00	12.00	4
5.010	5.010	6.000	76.00	40.00	12.00	4
5.020	5.020	6.000	76.00	40.00	12.00	4
5.030	5.030	6.000	76.00	40.00	12.00	4
5.970	5.970	6.000	76.00	40.00	12.00	4
5.980	5.980	6.000	76.00	40.00	12.00	4
5.990	5.990	6.000	76.00	40.00	12.00	4
6.000	6.000	6.000	76.00	40.00	12.00	4
6.010	6.010	6.000	76.00	40.00	12.00	4
6.020	6.020	6.000	76.00	40.00	12.00	4
6.030	6.030	6.000	76.00	40.00	12.00	4
7.000	7.000	8.000	101.00	65.00	16.00	6
7.970	7.970	8.000	101.00	65.00	16.00	6



Availability

○ bright

a TiAlN nanoA

Cb Carbo

