

# Boring bars


starting from 5 mm working diameter

The insert clamping and the geometry of the pocket seat is designed in a way that it protects the second cutting edge of the insert within the insert pocket and avoids the destruction or damage that might be caused by the impact of evacuated chips.

Clamping and releasing the insert is handled by means of a single clamp screw and is therefore very easy; at the same time the requirement for stock-keeping of spare-parts is reduced to a minimum.

## **Our mini-boring bars are also perfectly suitable for every kind of form recesses.**

In customer specific requirements the operational possibilities of our standard boring bars can on request be enormously increased by means of special form inserts.

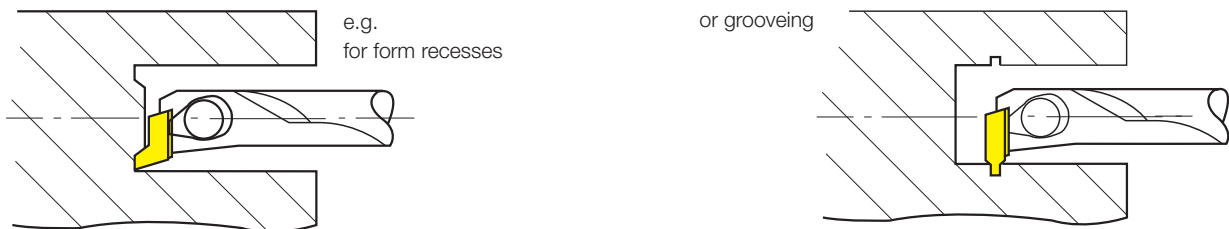

Please use our inquiry sheet on page 130 for requests of customer-specific special tooling solutions.

