

H Side milling cutters

axial μm -accurate adjustable

...,3“ sided

The side milling cutters constitute a further supplementation of our new milling cutter line and are a reasonable completion of our program.

As usual all inserts are adjustable, which makes a μm -accurate adjustment of the different tools possible, e.g. in gang milling cutters. For adjustment instructions see page 30.

Depending on the customer specific requirement standard inserts can often be used in these milling cutters which is generally possible due to the „neutral shape“. Special types of the inserts can be delivered within short time.


The features:

Range	Number of teeth	Width	Special type
\varnothing 80-250 mm	12 - 25	from 8 mm	from 5 mm

In gang milling cutters

standard-inserts are applicable
trilateral



Total length adjustable (L)
Width adjustable (a_p)
Position of the inserts
adjustable (X)

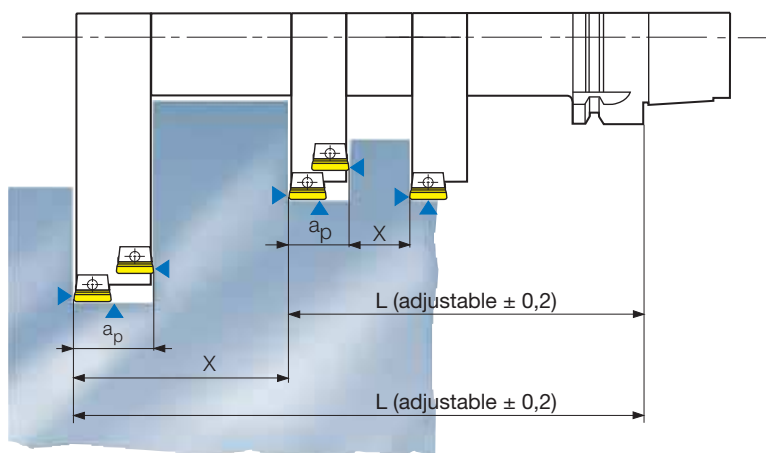

In groove milling cutters

Standard-inserts N-type
right-hand and left-hand
application possible

Width μm -accurate adjustable
adjustment range (a_p)
depending on the size
of insert up to $\pm 0,2$



Adjustment
instruction
page 44