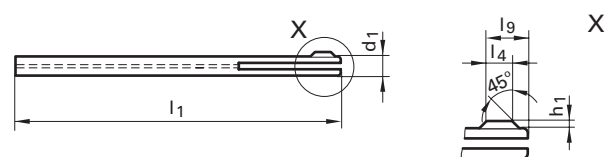



De-burring fork EW 100 G - program standard

with a straight shank for clamping in collet holders

<p>Guhring no. Standard Tool material Carbide grade Surface Type Discount group</p> 							4100							
							Guhring std.							
							Solid carbide							
							K							
							○							
							EW 100 G							
							120							
														
							Availability							
							nom. Ø	d1	for Ø range	l1	l4	l9	h1	●
							mm	mm	mm	mm	mm	mm	mm	●
							2.000	1.900	1.91 - 2.15	80.00	1.00	2.05	0.35	●
							2.250	2.100	2.16 - 2.40	80.00	1.50	2.60	0.40	●
							2.500	2.400	2.41 - 2.70	80.00	1.50	2.90	0.40	●
							2.750	2.600	2.71 - 2.90	90.00	1.50	2.95	0.45	●
							3.000	2.900	2.91 - 3.25	90.00	2.00	3.65	0.45	●
							3.500	3.200	3.26 - 3.60	90.00	2.00	3.80	0.60	●
							4.000	3.600	3.61 - 4.25	90.00	2.00	4.10	0.70	●
							4.500	4.200	4.26 - 4.75	90.00	2.50	4.60	0.70	●
							5.000	4.700	4.76 - 5.30	100.00	2.50	4.85	0.75	●
							5.500	5.200	5.31 - 5.80	100.00	2.50	4.85	0.75	●
							6.000	5.600	5.81 - 6.20	110.00	3.00	5.80	0.80	●
							6.500	6.000	6.21 - 6.70	110.00	3.00	5.90	0.90	●
							7.000	6.500	6.71 - 7.10	110.00	3.00	5.85	0.85	●
7.500	6.900	7.11 - 7.60	110.00	3.50	6.95	0.95	●							
8.000	7.300	7.61 - 8.05	110.00	3.50	7.00	1.00	●							
							●							
							●							
							●							
							●							
							●							
							●							

○ bright ○ steam tempered ● nitrited ● TiAlN ● TiCN ● TiN ● AlCrN ● MolyGlide