


## Collets ER metallic sealed

### Product information

- DIN 15488
- for application without sealing washer
- concentricity error max. 6 µm
- for high-performance tools with internal cooling e.g. HR 500 reamers
- ER-DM collets with restricted clamping range

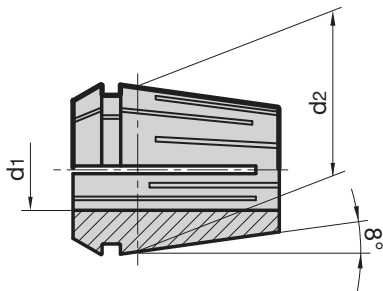

Series Number				4175
nominal size d <sub>2</sub>	d <sub>1</sub> mm	l <sub>1</sub> mm	Order Code	EDP Numbers
ER20	3.00	31.5	3.020	9041750030200
ER20	4.00	31.5	4.020	9041750040200
ER20	5.00	31.5	5.020	9041750050200
ER20	6.00	31.5	6.020	9041750060200
ER20	7 to 6.5	31.5	7.020	9041750070200
ER20	8 to 7.5	31.5	8.020	9041750080200
ER20	9 to 8.5	31.5	9.020	9041750090200
ER20	10 to 9.5	31.5	10.020	9041750100200
ER20	11 to 10.5	31.5	11.020	9041750110200
ER20	12 to 11.5	31.5	12.020	9041750120200
ER20	13 to 12.5	31.5	13.020	9041750130200
ER25	6.00	34	6.025	9041750060250
ER25	8 to 7.5	34	8.025	9041750080250
ER25	10 to 9.5	34	10.025	9041750100250
ER25	12 to 11.5	34	12.025	9041750120250
ER25	14 to 13.5	34	14.025	9041750140250
ER25	16 to 15.5	34	16.025	9041750160250
ER32	6.00	40	6.032	9041750060320
ER32	8 to 7.5	40	8.032	9041750080320
ER32	10 to 9.5	40	10.032	9041750100320
ER32	12 to 11.5	40	12.032	9041750120320
ER32	14 to 13.5	40	14.032	9041750140320
ER32	16 to 15.5	40	16.032	9041750160320
ER32	18 to 17.5	40	18.032	9041750180320
ER32	20 to 19.5	40	20.032	9041750200320