




Артикул №	4105
Стандарт	СТП
Тип	НТ 800 WP
Глубина сверления:	1xD
охлаждение	осевой
Направление резания	правое
Группа скидок	140
Техническая информация на стр.	135

Сверлильная сист.
со сменными
пластинами T 800

NEW

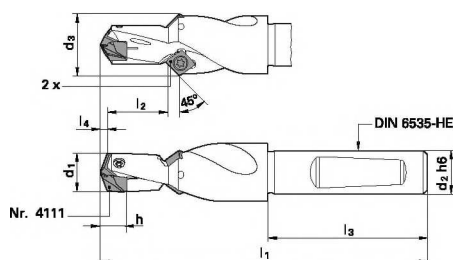

Размер опоры	d1	d2 h6	d3	l1	l2 макс.	l3	Код №	Цена/шт. в ЕВРО
	мм	мм	мм	мм	мм	мм		
110	11,00-11,99	12,000	17,000	81,00	12,00	45,00	11,000	●
110	11,00-11,99	12,700	17,000	81,00	12,00	45,00	11,005	●
120	12,00-12,99	12,000	18,000	84,00	13,00	45,00	12,000	●
120	12,00-12,99	12,700	18,000	84,00	13,00	45,00	12,005	●
130	13,00-13,99	14,000	18,000	86,00	14,00	45,00	13,000	●
130	13,00-13,99	15,875	18,000	86,00	14,00	48,00	13,005	●
140	14,00-15,99	16,000	18,000	93,00	16,00	48,00	14,000	●
140	14,00-15,99	15,875	18,000	93,00	16,00	48,00	14,005	●
160	16,00-17,99	18,000	20,000	99,00	18,00	48,00	16,000	●
160	16,00-17,99	19,050	20,000	99,00	18,00	50,00	16,005	●
180	18,00-19,99	20,000	22,000	106,00	20,00	50,00	18,000	●
180	18,00-19,99	19,050	22,000	106,00	20,00	50,00	18,005	●
200	20,00-21,99	25,000	24,000	117,00	22,00	56,00	20,000	●
200	20,00-21,99	25,400	24,000	117,00	22,00	56,00	20,005	●
220	22,00-23,99	25,000	26,000	122,00	24,00	56,00	22,000	●
220	22,00-23,99	25,400	26,000	122,00	24,00	56,00	22,005	●
240	24,00-25,99	25,000	28,000	128,00	26,00	56,00	24,000	●
240	24,00-25,99	25,400	28,000	128,00	26,00	56,00	24,005	●
260	26,00-27,99	32,000	32,000	142,00	28,00	60,00	26,000	●
260	26,00-27,99	31,750	32,000	142,00	28,00	60,00	26,005	●
280	28,00-29,99	32,000	34,000	147,00	30,00	60,00	28,000	●
280	28,00-29,99	31,750	34,000	147,00	30,00	60,00	28,005	●
300	30,00-31,99	32,000	38,000	152,00	32,00	60,00	30,000	●
300	30,00-31,99	31,750	38,000	152,00	32,00	60,00	30,005	●
320	32,00-35,99	32,000	42,000	163,00	36,00	60,00	32,000	●
320	32,00-35,99	31,750	42,000	163,00	36,00	60,00	32,005	●
360	36,00-40,00	32,000	46,000	173,00	40,00	60,00	36,000	●
360	36,00-40,00	31,750	46,000	173,00	40,00	60,00	36,005	●