

EXCLUSIVE[®]LINE


HSK-A hydraulic chucks with increased clamping force

Product information

- balancing quality: G6.3 / 15,000 rev./min
- axial length setting
- max. deviation f. concentricity 3 µm
- for tool shank tolerance h6
- to DIN 69882-7
- also available in extra-long lengths
l₁ = 150 / 160 mm and 200 mm
- HSK-A to DIN 69893

Scope of delivery

- incl. adjustment screw Guhring no. 4900
- incl. hexagon chuck key Guhring no. 4912
- order coolant delivery set Guhring no. 4949 separately

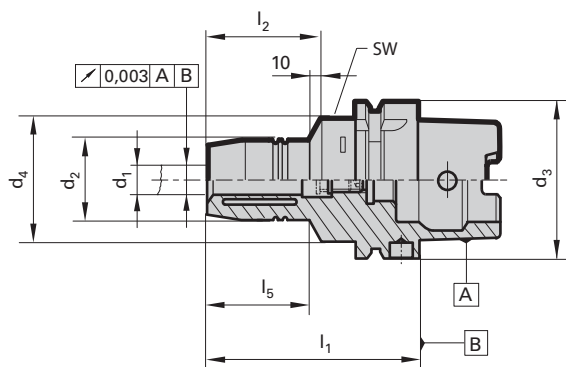

Series Number 4299

HSK-A d ₃	for shank Ø d ₁ h6 mm	d ₂ mm	d ₄ mm	l ₁ mm	l ₂ mm	l ₅ mm	incl. setting screw 4900 ...	SW	kg	Code no.	EDP
63	20	42	50.0	90	51	47.5	20.114	5	1.20	20.063	9042990200630
63	25	57	63.0	120	57	55.3	20.114	6	2.10	25.063	9042990250630
63	32	64	75.0	125	61	63	20.114	6	2.40	32.063	9042990320630
63	20	42	50.0	150	51	108	20.114	5	1.90	20.163	9042990201630
63	20	42	50.0	200	51	158	20.114	5	2.50	20.263	9042990202630
80	20	42	50.0	95	51	52	20.114	5	1.80	20.080	9042990200800
80	25	57	63.0	110	57	65	20.114	6	2.60	25.080	9042990250800
80	32	64	75.0	125	61	63	20.114	6	3.20	32.080	9042990320800
100	20	42	50.0	105	51	59	20.114	5	3.20	20.100	9042990201000
100	25	57	63.0	110	57	62	20.114	6	3.30	25.100	9042990251000
100	32	64	75.0	110	61	62	20.114	6	3.80	32.100	9042990321000
100	20	42	50.0	160	51	108	20.114	5	3.60	120.100	9042991201000
100	25	53	63.0	160	57	110	20.114	6	3.70	125.100	9042991251000
100	32	53	75.0	160	61	110	20.114	6	4.20	132.100	9042991321000
100	20	42	50.0	200	51	148	20.114	5	3.80	220.100	9042992201000
100	25	53	63.0	200	57	150	20.114	6	3.90	225.100	9042992251000
100	32	53	75.0	200	61	150	20.114	6	4.40	232.100	9042992321000